Changer for Attenuation Filters

High Speed Automatic Changer of Attenuation Filters for high intensity dynamics

Features

- Count rates from below 0.1 cps to above 10^9 cps
- For use in XRD 3003 Diffraction systems (mounted on adjustment base)
- Stepper motor driven, controlled by 1 axis of C 3006 controller
- Fully automatic control with Rayflex Software

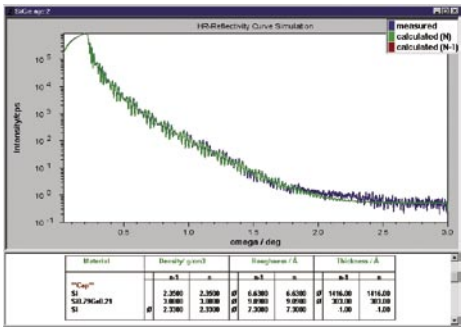

Example from a
Reflectometry Measurement

6 Filter Wheel Positions:

Pos. 1 – open

Pos. 2 - 0.15 mm Al

Pos. 3 - 0.30 mm Al

Pos. 4 - 0.45 mm Al

Pos. 5 - 0.60 mm Al

Pos. 6 - 0.75 mm Al

GEInspectionTechnologies.com

© 2005 General Electric Company. All Rights Reserved. GEIT-30152GB (01/05)
We reserve the right to technical modifications without prior notice.